




REXROTH BEARINGS DEVELOPMENT LTD

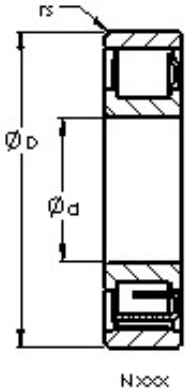

AST N1013 M cylindrical roller bearings

Bearing No. N1013 M

| | |
|--|-----------------------------------|
| Size | 65x100x18 mm |
| Bore Diameter | 65 mm |
| Outer Diameter | 100 mm |
| Width | 18 mm |
| Bearing Type | N |
| Bore Dia (d) | 65.0000 |
| Outer Dia (D) | 100.0000 |
| Width (B) | 18.0000 |
| Radius (min) (rs) | 1.000 |
| Dynamic Load Rating (Cr) | 39,700 |
| Static Load Rating (Cor) | 49,000 |
| Max Speed (Grease) (X1000 RPM) | 7 |
| Max Speed (Oil) (X1000 RPM) | 8 |
| Max. Shaft Shoulder Dia. Inner (Li) | 74.5 |
| Min. Housing Shoulder Dia., Outer (Lo) | 90.5 |
| Weight (g) | 493.00 |
| Precision | RBEC 1 |
| Standard Clearance | C0 |
| Material | 52100 Chrome steel, or equivalent |

N1013 M Bearing 2D drawings and 3D CAD models